


Hulpstukken heien

Hydraulische heihammers

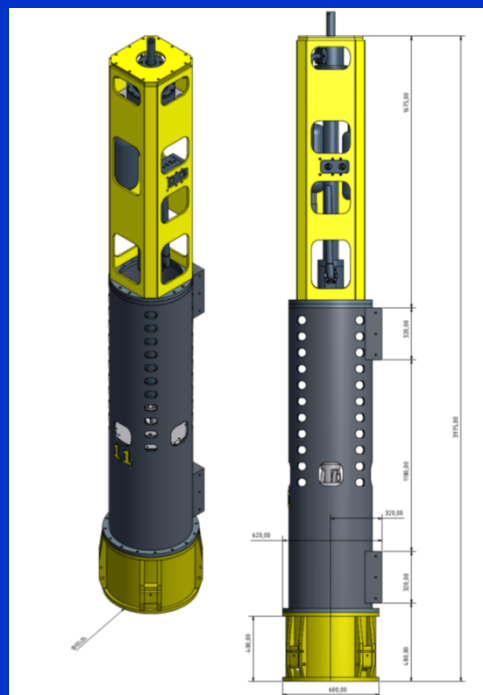

**Met Lebotec
Funderingsmachines
bouwt u op zeker**

Valgewichten

Buisdiameter paal [mm]	wanddikte [mm]	theoretische blok diameter [mm]	gekozen blok diameter [mm]	werkelijke speling [mm]	streef gewicht [kg]	benodigde lengte blok(loodvulling) [m]	benodigde lengte blok (massief staal) [m]
168	4	140	139,7	14,2	500	3,44	4,29
219	4	191	177,8	20,6	800	3,28	4,24
273	4	245	219,1	27,0	1000	2,63	3,49
304	4,5	275	273	15,5	1300	2,15	2,92
323	5	293	273	25,0	1300	2,15	2,92
355	5	325	323,9	15,6	2000	2,32	3,19
406	6	374	365,4	20,3	2500	2,26	3,13

Minimale speling tussen blok en buis is 10 mm

Basis wanddikte blok = 20 mm

Gecertificeerde kettingen